



1630 W 11th ST, UNIT E, UPLAND, CA 91786

909.946.2942, 909.985.2301 FAX

www.hinsonracing.com

FP313-8-1401

PLATE FIBER CLUTCH KIT

Congratulations, you have just purchased the finest fiber, steel, and springs clutch pack available. Hinson Clutch Components are used by Team Honda, Team Suzuki, and Team Pro Circuit Kawasaki.

Instructions:

1. Remove clutch plates from box
2. Set two narrow fibers aside these will be installed last.
3. The 6 black eared fibers will be installed first
4. Drain engine oil
5. Remove clutch cover being sure to pay attention that the dowel pins do not fall out
6. Remove stock clutch springs
7. Remove stock clutch pack separating the steel plates out and putting the one thick different shaped steel plate separate (these will be reused, if the stock steels are discolored or are very dark we do not recommend reusing as this will cause the new Hinson fibers to wear out very quick)
8. Install one of the black eared fibers and one steel plate Alternating with the black eared fibers and the standard steel plates
9. Now get the two narrow fibers and the one different shaped steel plate
10. Install one of the narrow fibers and then the different steel plate then the last narrow fiber plate
11. Re-install pressure plate making sure it meshes with the outer most steel plate also being sure that the pressure plate sits all the way down on the outside fiber
12. Install clutch springs, and all other stock components.
13. Reinstall clutch cover gasket and dowels (be sure to inspect gasket is not damaged before re installing, replace if damaged)
14. Refill with engine oil
15. Re adjust free play to 1/8 to a 1/4

We recommend using a petroleum based 10w-40 Oil in your engine, and that you change it after each time you ride. We also recommend you soak your clutch plates at least 12 hours before you install them. Use of Kevlar or Carbon fiber clutch plates will cause excessive wear and could void your warranty.


Thank you for purchasing a Hinson Clutch Components product. If you have any questions or need technical assistance, please call us at (909) 946-2942 or check us out a

WWW.HINSONRACING.COM



Crucial Inspection

If your clutch has a jutter spring and seat located at the bottom of your clutch pack against the inner hub, **these both need to be removed.**

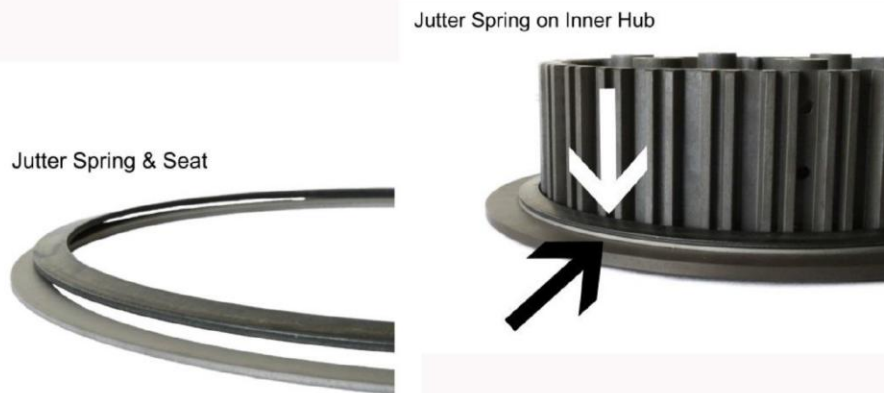

Warranty information

All merchandise manufactured by Hinson Clutch Components is guaranteed against defects in material and workmanship for a period of six months from the original date of purchase. You must register your product at www.hinsonracing.com to activate your warranty. Use of Kevlar and carbon fiber clutch plates will cause excessive wear and will void your warranty. Hinson Clutch Components will not warranty any product that has been modified, or where the product became defective due to improper installation, improper use, or any other misuse of the product. Hinson Clutch Components shall not be liable for any other damages caused by any defects in the product, whether incidental, consequential or otherwise. If your product is defective we will, at our discretion, repair or replace the product after it is returned to Hinson Clutch Components for a warranty inspection. Any request for warranty assistance will require your original receipt or acceptable proof of purchase. Hinson Clutch Components liability is limited to the cost of repair or replacement of the product. All warranty items will be viewed and acted upon at the discretion of Hinson Clutch Components.

Thank you very much for purchasing a Hinson Clutch Component!