



Thank you very much for purchasing a Hinson Clutch Component!

Visit Hinsonracing.com for more products available for this model

Warranty information

All merchandise manufactured by Hinson Clutch Components is guaranteed against defects in material and workmanship for a period of six months from the original date of purchase. You must register your product at www.hinsonracing.com to activate your warranty. Use of Kevlar and carbon fiber clutch plates will cause excessive wear and will void your warranty. Hinson Clutch Components will not warranty any product that has been modified, or where the product became defective due to improper installation, improper use, or any other misuse of the product. Hinson Clutch Components shall not be liable for any other damages caused by any defects in the product, whether incidental, consequential or otherwise. If your product is defective we will, at our discretion, repair or replace the product after it is returned to Hinson Clutch Components for a warranty inspection. Any request for warranty assistance will require your original receipt or acceptable proof of purchase. Hinson Clutch Components liability is limited to the cost of repair or replacement of the product. All warranty items will be viewed and acted upon at the discretion of Hinson Clutch Components.




FSC Clutch Plate & Spring Kit

**For additional fitment info see www.hinsonracing.com*

Thank you for purchasing Hinson Clutch Components. Looking through these instructions will ensure your machine is on the way to its highest level of performance.

FSC789-7-0616

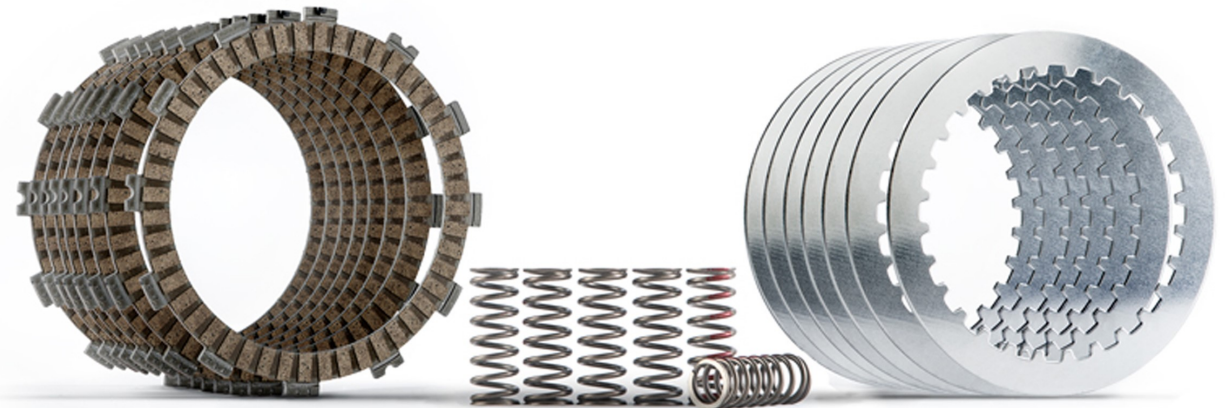

1630 W. 11th St. Unit E, Upland, CA 91786

p 909.946.2942 | f 909.985.2301 | www.hinsonracing.com | @hinsonracing



1630 W 11th ST, UNIT E, UPLAND, CA 91786 909.946.2942, 909.985.2301 FAX
www.hinsonracing.com

FSC 789-7-0616

Congratulations, you have just purchased the finest fiber, steel and spring clutch pack available. Hinson Clutch Components are used by Team Honda, Team Suzuki and Team Pro Circuit Kawasaki.

Crucial Inspection

If your clutch has a jutter spring and seat ring, located at the bottom of your inner hub, this needs to be removed

Instructions:

1. Drain the oil.
2. Remove the stock springs and the clutch stack.
3. Install (1) of the black marked plates first.
4. Install (6) steel plates alternating with the (5) fiber plates. Be sure to align the four slots on the steels throughout the stack (see figure 1),
5. Install the last black marked plate.
6. Reinstall the pressure plate, your new Hinson clutch springs, and the spring bolts. Be sure to torque to manufacturers specification.
7. Reinstall your clutch cover, be sure to inspect the O ring.
8. Refill engine with oil

We recommend using a petroleum based oil in your engine, and that you change it after each time you ride. We also recommend you soak your clutch plates at least 12 hours before you install them.

Thank you for purchasing a Hinson Clutch Components product. If you have any questions or need technical assistance, please call us at (909) 946-2942,



Figure 1



Crucial Inspection

If your clutch has a jutter spring and seat located at the bottom of your clutch pack against the inner hub, **these both need to be removed.**

Jutter Spring on Inner Hub

